


Doufit TR-05 Trampoline

Instruction Manual

(5FT)

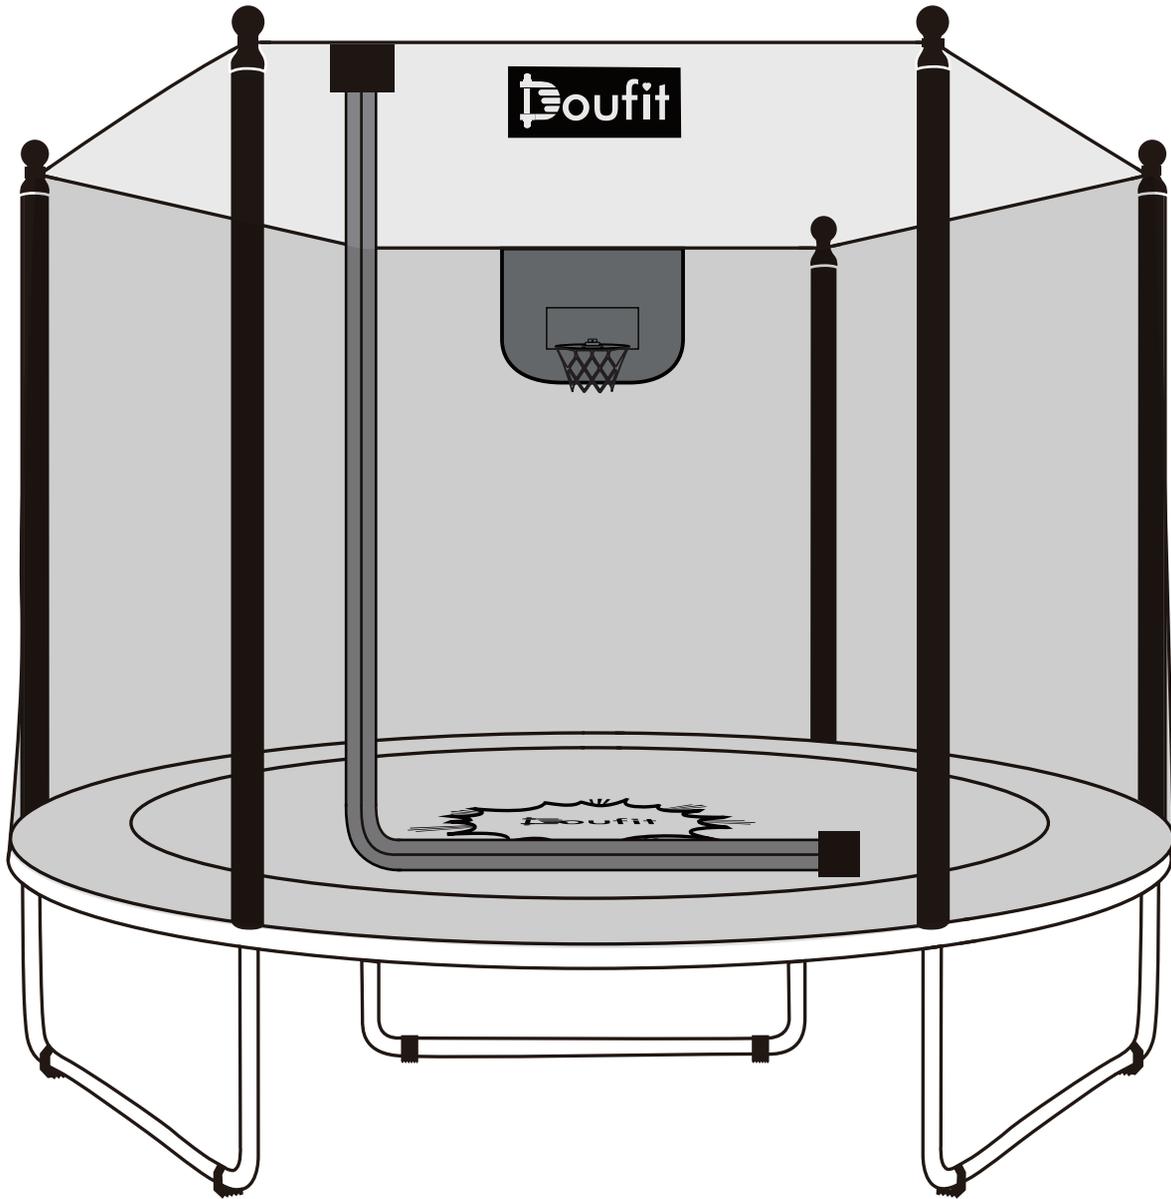

If the item is damaged or you are missing some parts, please contact service@doufit.net with your order number, we will try our best to solve it for you ASAP.



service@doufit.net



www.doufit.net

Catalogue

Precautions-----	1
Parts List -----	2
Assembly Method-----	3
Service -----	6

Precautions






- *The maximum weight capacity is 220 Lbs.
- *The trampoline must be assembled by adults.
- *For children, they can only use it under the guardianship of adults.
- *Please jump near the central area.
- *Before exercise, please take off your valuable accessories, such as glasses, necklace, and watch, to avoid falling.
- *Don't put anything in your pocket or on the trampoline during use.
- *Place the trampoline on a flat, large, and dry place to use.
- *Keep the jumping mat and the spring pad dry.
- *The door on the net before using.
- *Don't wear clothes with hooks and shoes during use.
- *Don't jump on the trampoline from outside or high places.
- *Don't somersault. Otherwise, if you land on your head or neck, you may be paralyzed or even dead!
- *The product can't be used as a jumping board.
- *Please clean it with a wet cloth, and corrosive solvent cleaners are prohibited.
- *Don't use this product if you have any conditions or diseases as follows:
 - Breathing obstacle;
 - Spinal injury, cerebral sclerosis, or acutely swollen joints;
 - Osteoporosis, Gout, unhealed fractures, or surgically implanted orthopedic supports;
 - Hypertension, heart disease, or using a cardiac pacemaker;
 - Using anti-coagulants in high doses.

Attention:

*Mats and nets will age prematurely under long-term direct sunlight. To prevent premature aging, please store the trampoline indoors when it is snowing, raining, windy, or the product is not in use.

Parts List

Notice: if any part is missing, distorted or broken when you receive the package, please contact service@doufit.net with your order number, we will send the replacement part to you as soon as possible.

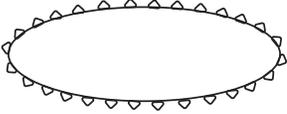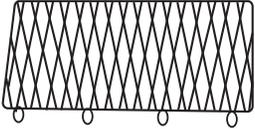 <p>1.Foot pipe x 3</p>	 <p>2.Frame joint x 6</p>	 <p>3.Frame pipe x 6</p>
 <p>4.Mat with spring pad</p>	 <p>5.Spring x 36</p>	 <p>6.Upper support pipe x 6</p>
 <p>7.Lower support pipe x 6</p>	 <p>8.Net</p>	 <p>9.M4*10mm bolt x 18</p>
 <p>10.Screwdriver</p>	 <p>11.Spring hook</p>	 <p>12.Basketball hoop (if enclosed)</p>
 <p>13.Ball (if enclosed)</p>	 <p>14.Air pump needle (in the handle of the inflator) (if enclosed)</p>	 <p>15.Inflator (if enclosed)</p>

The oil on the steel pipe is used to prevent rust. You can easily wipe it away.

Assembly Method



For the assembly video, please visit:
www.youtube.com/channel/UCorBkk34KZgI96OyGskjFdA

Step 1: Assemble the frame pipes and the foot pipes

Attach a frame joint(No.2) to the bigger side of the frame pipe(No.3).


If it is too difficult to insert completely, please knock the square tube of the frame joint with a hammer.

Attention: Don't knock the round tube! Or it will be deformed and damaged.

Connect the smaller side of the second frame pipe and then attach a foot pipe to two frame joints. Screw six M4*10mm bolts(No.9) with the screwdriver(No.10).


Assemble other frame pipes and foot pipes in the same way.

Attention: When assembly, be careful of sharp edges to avoid scratches.

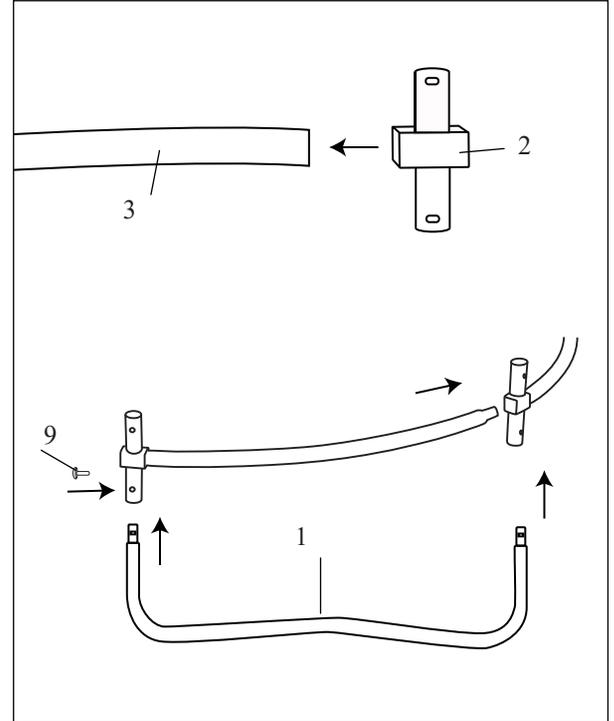

Step 2: Assemble the frame

Connect above frame pipe assemblies to assemble the frame. For the last connection, please place one side against the wall. And then try your best to press frame pipes of the other side inward, so that the frame can be connected well.

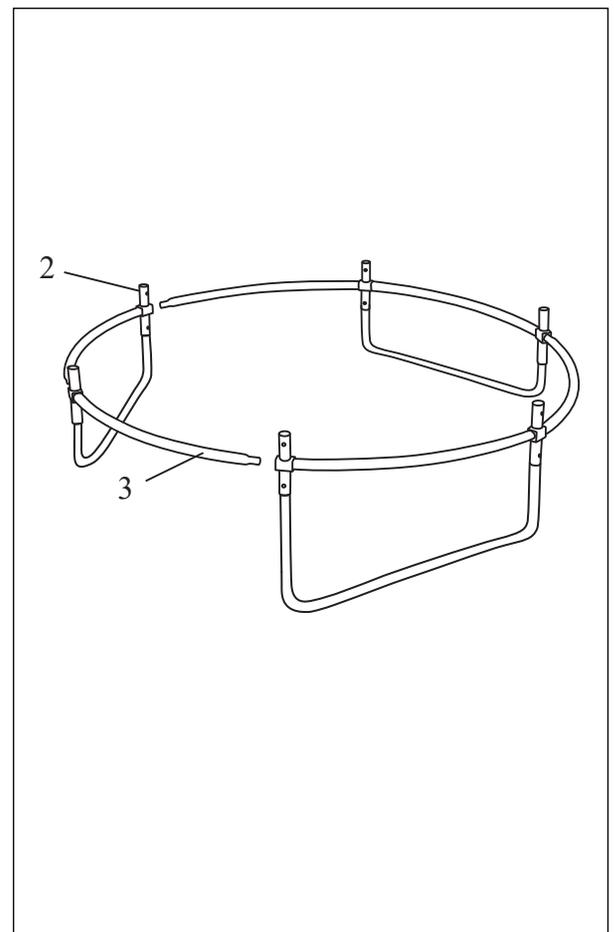

Step 3: Assemble the jumping mat with spring pad

The spring pad is sewn with the jumping pad. When you assemble the jumping mat, please ensure the gap of the spring pad matches the frame joint.

Attention: Two hooks of the spring(No.5) are different.

The more curved hook should be attached to the jumping mat(No.4), while another side should be attached to the frame. You need to attach the springs by using the spring hook(No.11) as follows, or it will be difficult to finish.



Firstly, set off the spring pad.

Secondly, attach a spring every 9 holes.

Thirdly, attach a spring every 5 holes.



Fourthly, attach a spring every 2 holes.

Finally, attach the remaining springs to the remaining holes.

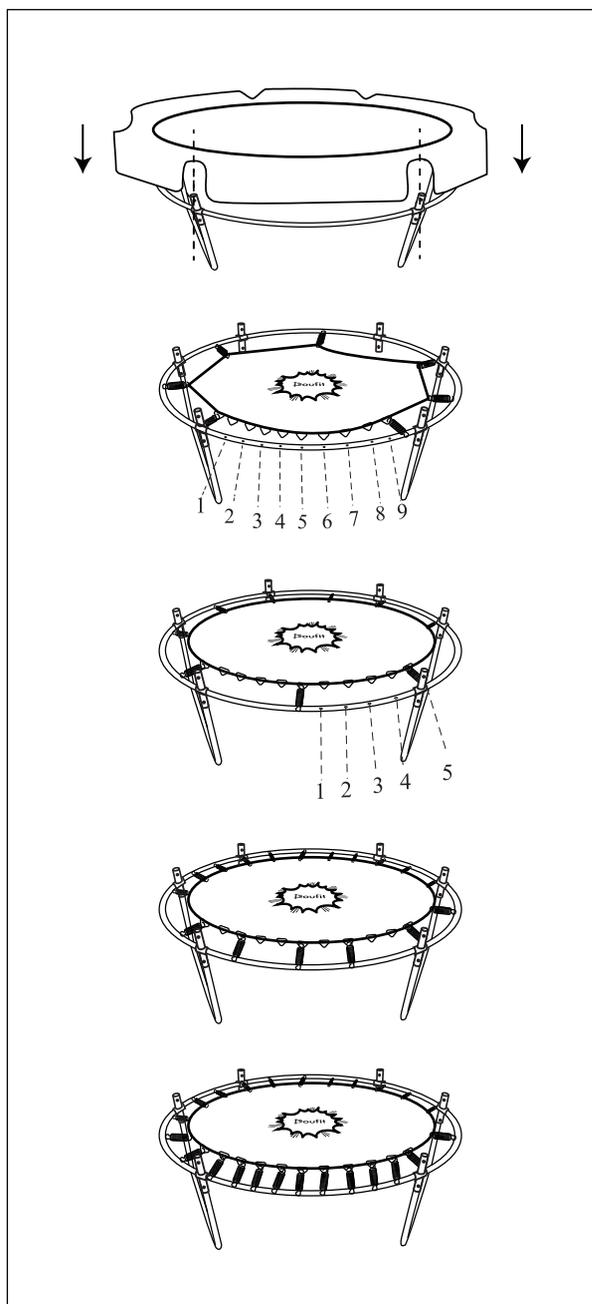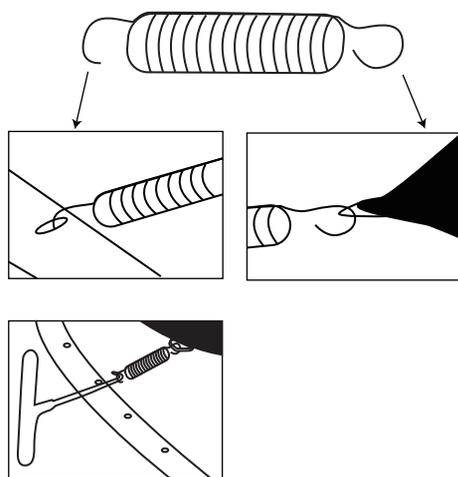

Step 4: Assemble the spring pad

Cover the spring pad on the springs, and tie all band under the spring pad to the frame.

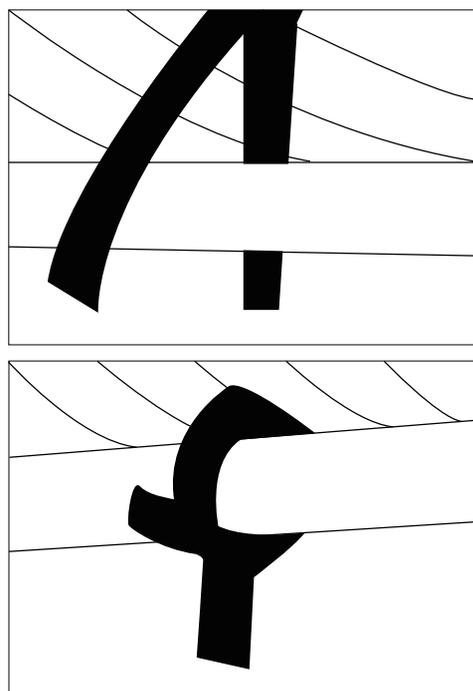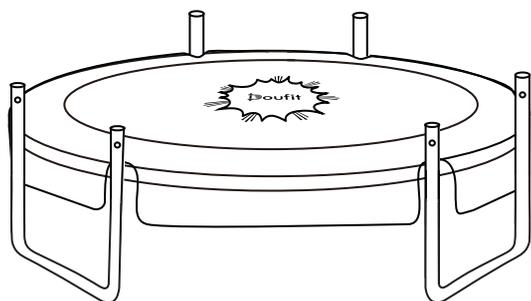


Step 5: Assemble the support pipes

For this step, please prepare six upper support pipes (No.6), six lower support pipes(No.7), twelve M4*10mm bolts(No.9), and the screwdriver(No.10).

Attention: The upper support pipe has a top cap, while the upper support pipe doesn't have.

Insert an below support pipe to each upper support pipe.
Screw six M4*10mm bolts to fix. Insert above support pipe assemblies to the frame. Screw six M4*10mm bolts to fix.

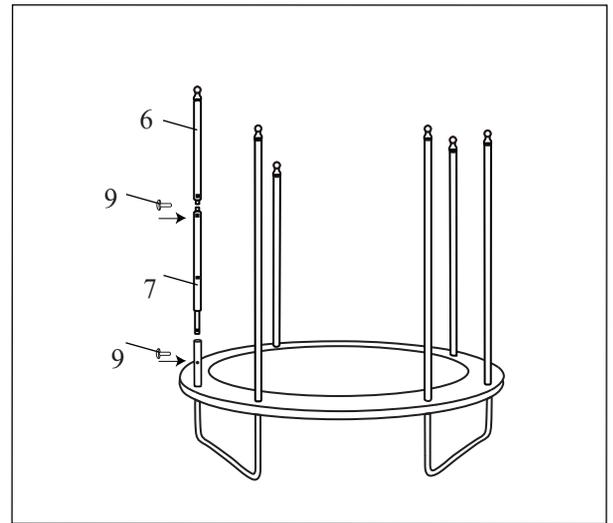

Step 6: Assemble the net





There are six sleeves on the net(No.8), and six bands under the net.

Insert six support pipes to six sleeves.

Slowly pull down sleeves to straighten the net.

Tie bands under the net to the spring triangle rings.


Attention: If the band is very difficult to touch the triangle ring, please try pulling the bottom of the net down a little.

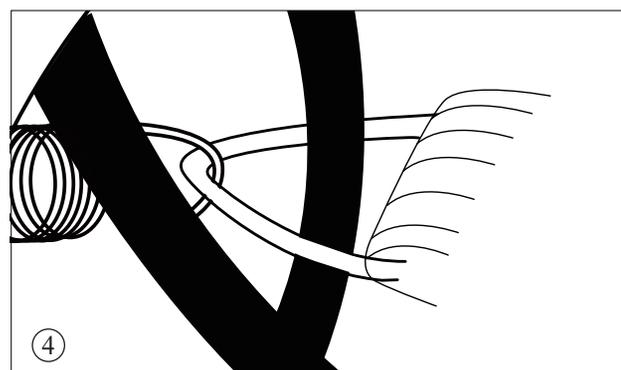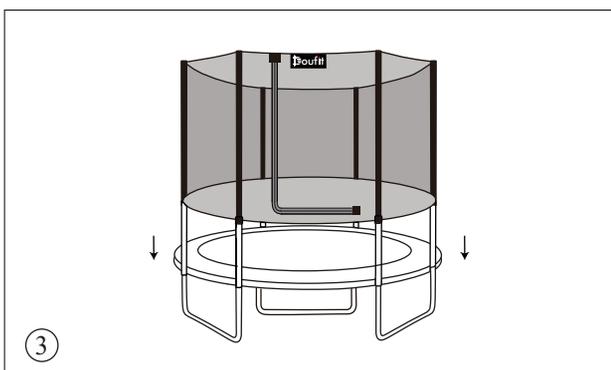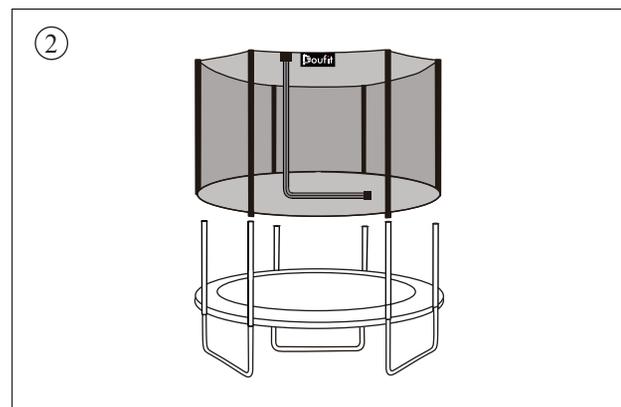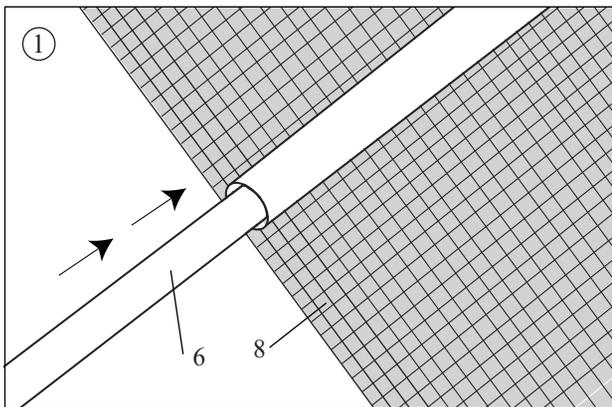

Step 7: Assemble the kid basketball hoop (if enclosed)

Attach the basketball hoop(No.12) on the net. Tie two bands to two support pipes.

Attention: There is an air pump needle(No.14) in the handle of the inflator(No.15).
Inflate the ball(No.13) with the air pump needle and the inflator.

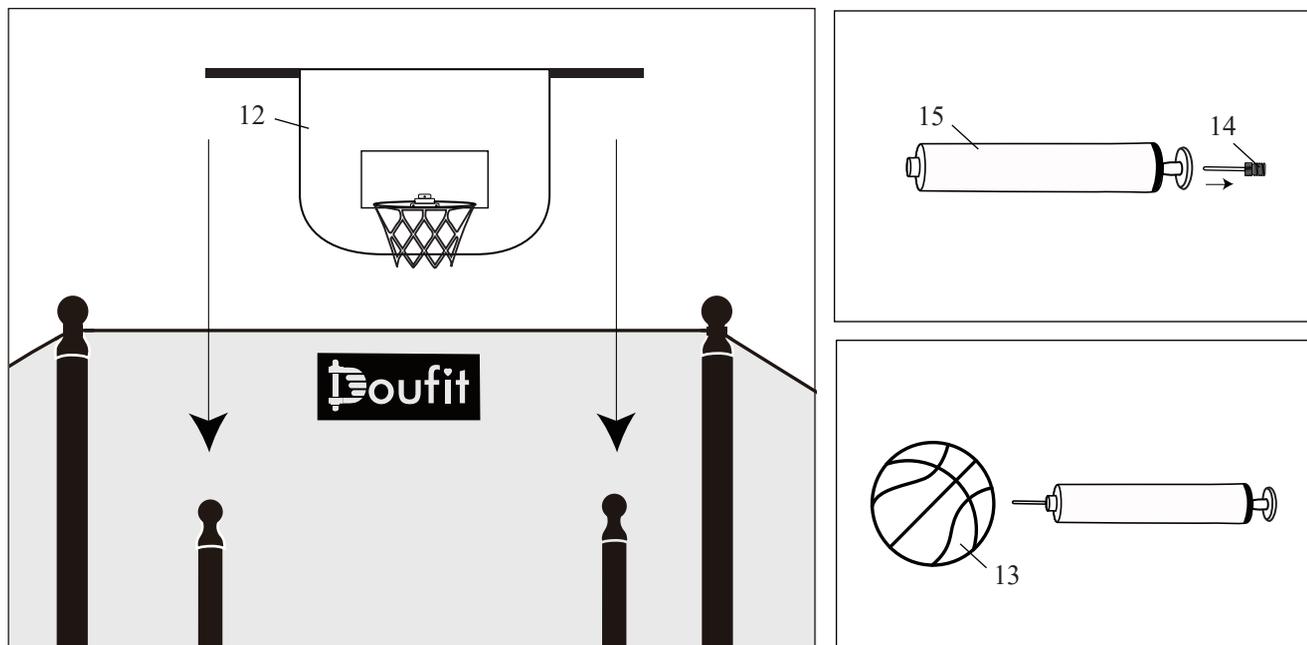

Service

If the item is damaged or you are missing some parts, please contact service@doufit.net with your order number, we will try our best to solve it for you ASAP.



service@doufit.net



www.doufit.net